

Drink Experience

BARZZONI™
W I N E S P A C E

www.barzzoni.com

A photograph of several large, clear ice cubes floating in a pool of water. The water is a deep blue color, and the ice cubes are translucent with some air bubbles trapped inside. The lighting is soft, creating a clean and refreshing aesthetic.

*Water
and
Ice*

A photograph of three cocktails on a wooden bar. On the left is a martini glass with a yellow drink and a lemon wedge. In the center is a margarita glass with a yellow drink and a salted rim. On the right is a coupe glass with a dark drink and a thick white foam head. The background is dark with some bokeh light spots.

*Cocktails
AND
Bar*

An abstract, marbled background with swirling patterns of red, white, and grey. The colors blend together in a fluid, organic way, creating a sense of movement and depth.

WINES
AND
CHAMP-
PAGNES

Drink Experience

BARZZONI™
W I N E S P A C E

www.barzzoni.com




Set the kitchen with **Billi** advanced filtered water with temperature controls, sparkling water and a range of luxury faucets to match premium design.

At the bar elevate the spirit with **Glastender** cocktail station and accessories, back bar refrigerators, frosters matching your interior veneer finishes.

From **Dunavox** built-in Wine refrigerators to **ITV** crystal cube ice makers, or **Vitrifrigo** drawer fridge and freezers.

Specialize Wine Vault with climate control and custom enclosure by **The Wine Square**, showcase wine wall by **Della Marta**, or bespoke cellar by **Caveduke**.

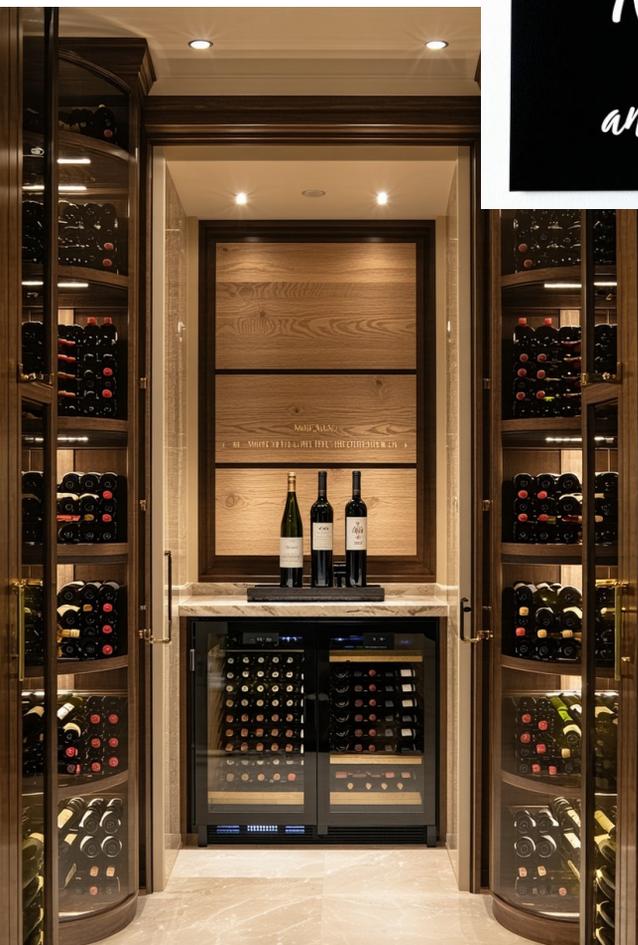

*Kitchen,
Bar
and Wine*



Which space do you need to spruce? And we provide the suggestion for the area, lets start one by one.

Glastender. TEFCOLD®

VITRIFRIGO
COOL AND BEYOND

Optimum

Glastender®

DÉCOR COLLECTION



Features

Designed for corporate headquarters, event suites, upscale resorts, or experiential venues, this exclusive collection fits seamlessly with the bar top to become one with sophisticated décor.

One with Interior Design

Versatile cabinet bases merge with one-piece, field-installed marble, quartz, or other luxury countertops.

Finish options are customizable to the extent of one's imagination.



Equipment Unveiled

Select from a collection of recessed equipment to adorn the bar top, including ice bins, bottle wells, and under-mount work centers paired with dispensing systems and refrigeration.




First-Rate Quality

The Décor Collection is crafted to the same first-rate standard of durability, cleanability, and efficiency you love and expect of Glastender.

Architectural Modular Bars

BLEND IN TO STAND OUT

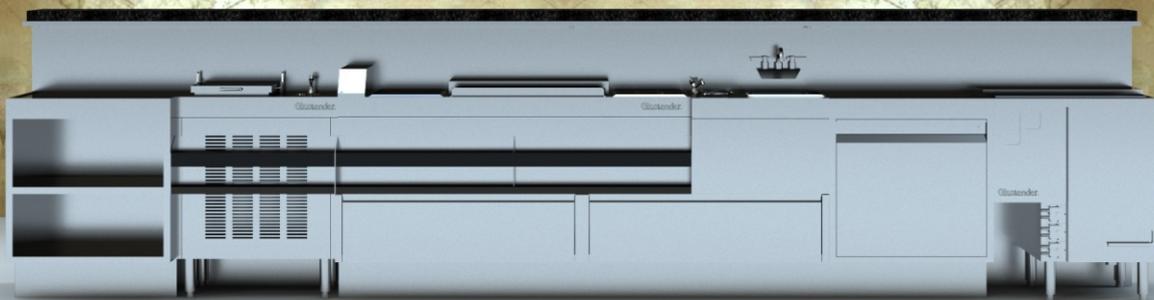

Glastender.

DESIGNED AND MADE IN THE U.S.A.

THE DESIGN APPROACH TO BAR



Creative designed at Bargears © 2018


The difference is obvious. It is the Approach to product design.

Glastender will create bar equipment in different categories with a focus on creating an aesthetic line that becomes one when combined.

Example, the 3" trim visible on front ledge running across the underbar through 19" depth and 24" depths. Glastender will always view from the point of the big idea, the wholeness and then go into detail of category and modules.

This assures any addition will blend in. Your Glastender bar is made to create a Work of Art through State of Art.

This is what differentiates Glastender from its competition. It is the approach to create a bar through design.

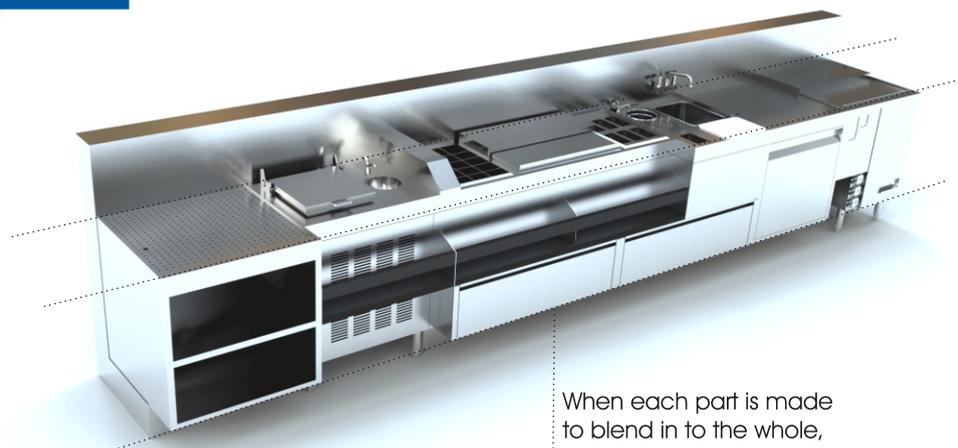

When each part is made to blend in to the whole, result is symphonic.



Glastender

Competing line

Glastender, Inc

5400 North Michigan, Saginaw
MI 48604 9780 USA | Glastender.Com
| 989 752 4275



A family company manufacturing in the USA

www.glastender.com



DI-IS24



DI-IW24



Intertek

4004503

Conforms to NSF/ANSI STD 2
Certified to CSA STD B45.4

All faucets are NSF/ANSI 61, Annex G low lead compliant

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Drop-In Hand Units

DI-I	DI-IS24, DI-IS24-LF, DI-IW24, DI-IW24-LF
-------------	--

Standard Features

- Manufactured with total welded construction to meet all NSF® standards
- Stainless steel top, interior liner, and sink bowl
- Unique hemmed edge for added strength and visual appeal
- 9-1/4" by 11-1/2" by 6" deep sink bowl
- Includes four 1/4-20 x 1-1/2" studs for mounting to countertop
- Includes 1-1/2" IPS drain fitting
- PVC plastic breaker strip around ice bin liner: creates 5/16" raised edge around liner, acts as thermal barrier to prevent heat transfer, and makes the cover slide easier
- Sliding stainless steel cover
- Eco friendly foamed-in-place insulation has zero impact on global warming or ozone depletion
- Galvanized steel exterior wrap
- 10-1/2" deep liner
- Heavy-duty faucet is standard (available less faucet by adding the suffix '-LF' to the model number)

Specifications

Drains

- Sink: 1-1/2" I.P.S. Threaded drain will fit Dearborn part #8033 slipnut and part #W-573P washer.
- Ice Bin: 1-1/2" tail piece

Faucet (not included with -LF models)

- DI-IS24: Deck mount on 4" centers, accepts 3/8" sink leads, hot and cold water connections required
- DI-IW24: Deck mount water filler, accepts 3/8" sink lead, cold water connection required

Sink Bowl Dimensions

- 9-1/4" by 11-1/2" by 6" deep

Cover

- Two piece sliding cover, stainless steel, included with all models

Ice Bin Liner Depth

- 10-1/2"

Ice Capacity

- 33 lbs

Cut-out Dimensions

- 17-1/2" by 22-1/2"

Materials

- 20 gauge stainless steel parts include: All components unless otherwise noted
- 16 gauge galvanized steel part include: faucet support bracket
- 22 gauge galvanized steel parts include: exterior wrap and bottom

⚠ WARNING: The plastic wet waste strainer included with this product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov. **Part #03000483**
Warning applies to State of California only.


To view cleaning and care instructions, please visit: https://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf

<p>Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com</p>	Approval/Notes:
<p><small>Specifications subject to change without notice. For current specifications please visit our website.</small></p>	


Drop-In Hand Units

Dimensional Information

DI-IS24

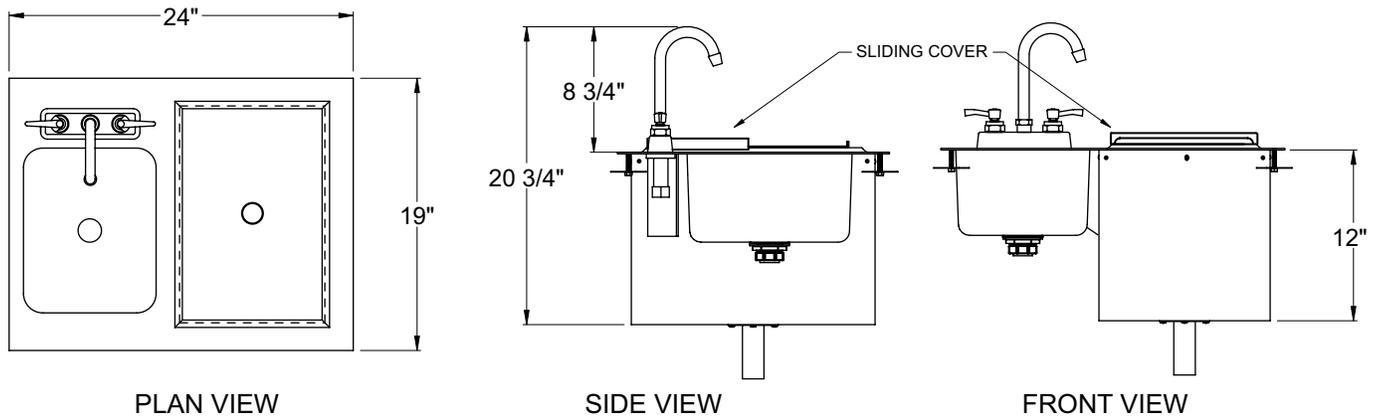

DI-IW24

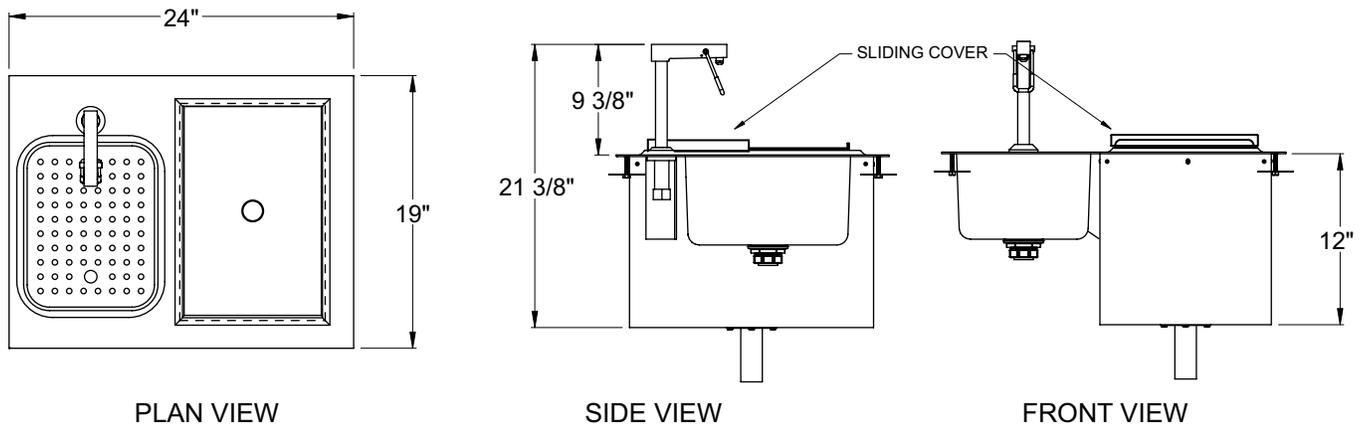


CUTOUT INFORMATION

INSTALLATION INSTRUCTIONS*


1. Remove angle brackets from drop-in unit.
2. Place unit into appropriate size cut-out for specific model number used.
3. Make initial drain connections, especially if access to drain is limited once the unit is in place.
4. Place unit into cut-out and finish plumbing the drain line.
5. Replace angle brackets, firmly tighten screws.
6. Place U-channels on top of bolts.
7. Tighten each bolt evenly along U-channels.
8. To establish proper sanitation operation and to comply with NSF & health codes, this unit must be sealed to the surface to which it is mounted using an NSF listed sealant. Place a bead of sealant along outer edges of the mounting flange and remove any excessive amount. Make sure there are no gaps in the sealant as the intent is to prevent liquid spillage from adjacent surfaces from passing under inaccessible portions of the equipment.

*Provided hardware allows for unit to be removable as necessary.

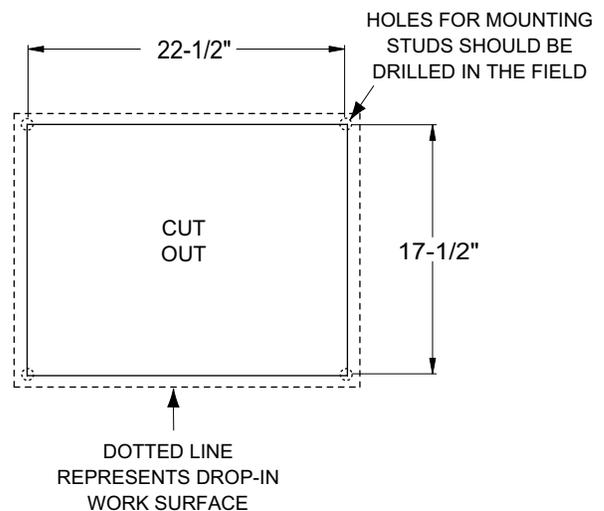


Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Drop-In Drain Pans

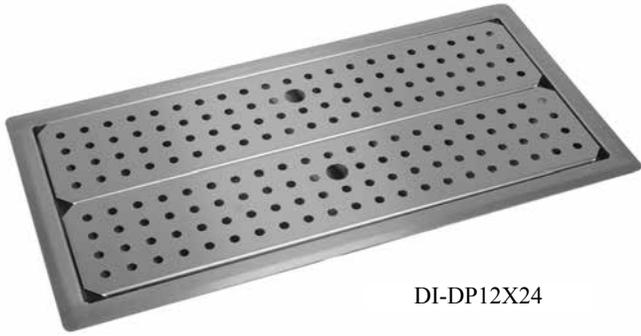

DI-DP12X24

Model Number Key

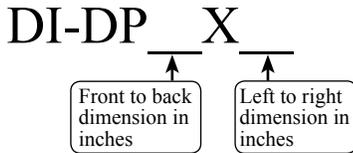

- DI-DP12X24, DI-DP12X30, DI-DP12X36,
 DI-DP12X42, DI-DP12X48,
 DI-DP18X24, DI-DP18X30, DI-DP18X36,
 DI-DP18X42, DI-DP18X48

Standard Features

- All stainless steel construction
- 18 gauge stainless steel pan with removable perforated inserts
- Available in standard widths of 12" or 18" and lengths from 24" to 48". Custom sizes also available
- Drain consists of 1/2" tailpiece that exits from the bottom of the unit
- Drain pan flange includes self-rimming edge for tight fit to work surface
- Installation kit includes: 10' of clear vinyl drain tube, one 4" Ty-wrap, three #10 x 1/2" stainless steel sheet metal screws, three #10 x 1/2" black sheet metal screws, three cable clamps, two 1/2" x 1/2" plastic elbows
- Install by making cut-out in work surface (see details below), apply silicone sealant to underside of drain pan flange, set in place and plumb drain line.

To view cleaning and care instructions, please visit: https://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf

Dimensional Information	Cut-Out Details
<p>X = Left to right dimension from 24" to 48", in 6" increments Y = Front to back dimension of 12" or 18"</p> <p style="text-align: center;">PLAN VIEW</p> <p style="text-align: center;">SIDE ELEVATION (not to scale)</p>	<p>Make cut-out 1-3/4" smaller than the outer flange dimensions. This will leave approximately 1/8" gap between edge of cut-out and the drain pan sides for a snug fit.</p> <p style="text-align: center; font-weight: bold;">CUT-OUT</p> <p>EXAMPLE: A DI-DP12X24 which measures 12" x 24" would require a cut-out size of 10-1/4" x 22-1/4"</p>

<p>Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com</p>	<p>Approval/Notes:</p>
Specifications subject to change without notice. For current specifications please visit our website.	

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Drop-In Drink Rails

DI-DR24, DI-DR30, DI-DR36



DI-DR30
Top View



DI-DR30
Front View



Intertek

4004503

Conforms to ANSI/NSF STD 2

Standard Features

- All stainless steel construction
- Available in 24", 30", or 36" lengths
- Drain is a 1/2" welded tailpiece that exits from the bottom of the unit
- Drain pan includes 1/2" flange
- Installation kit includes: 10' of clear vinyl drain tube, five - 4" Ty-wraps, and two - 1/2" plastic elbows
- Install by making cut-out in work surface (see Cut-Out Dimensions under Specifications). Make initial drain connection, especially if access to drain is limited once the unit is in place. Apply silicone sealant to underside of flange. Set in place and finish plumbing the drain line.

Specifications

Drains

- 1/2" welded tailpiece

Cut-out Dimensions


- Model DI-DR24 - 4-1/4" by 23-1/4"
- Model DI-DR30 - 4-1/4" by 29-1/4"
- Model DI-DR36 - 4-1/4" by 35-1/4"

Materials

- 20 gauge stainless steel parts include: perforated insert
- 18 gauge stainless steel parts include: drain pan


To view cleaning and care instructions, please visit:
https://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf

Dimensional Information




PLAN VIEW

X = Left to right dimension is 24", 30", or 36"



FRONT VIEW

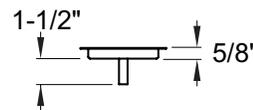

SIDE ELEVATION

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.	

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Drop-In Rinsers Faucet

DI-RF7, DI-RF12, DI-RF18, DI-RF24






DI-RF7



DI-RF24

Dimensional Information

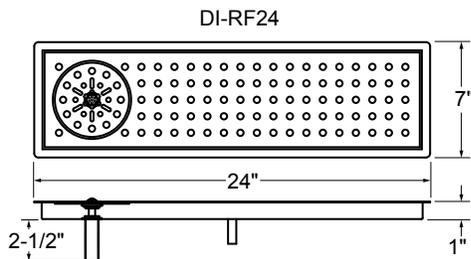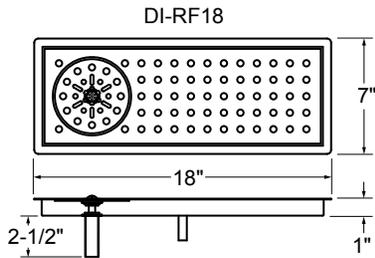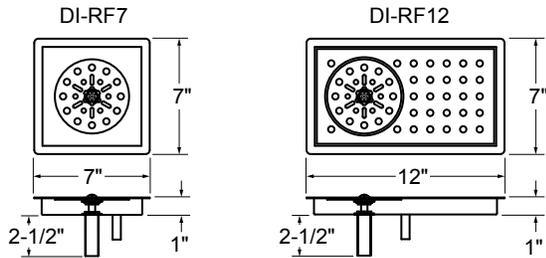

Standard Features

- All stainless steel construction
- Pan includes radius interior corners for easy cleaning
- Drain is a 1/2" welded tailpiece that exits from the bottom of the unit
- Drain pan includes 1/2" flange
- Installation kit includes: 10' of clear vinyl drain tube, five - 4" Ty-wraps, and two - 1/2" plastic elbows
- Install by making cut-out in work surface (see Cut-Out Dimensions under Specifications). Apply silicone sealant to underside of flange. Set in place and finish plumbing the unit.

Installation Notes

- Important: Unit must be installed in conformance with applicable federal, state, and local plumbing codes, including adequate backflow when required.
- Must install backflow prevention device conforming to ANSI/ASSE 1022 or ANSI/ASSE 1024 to meet plumbing code (not included).
- Install in-line water regulator (included).
- A separate shut-off valve is recommended (not included).

Specifications

Drains

- 1/2" welded tailpiece

Cut-out Dimensions

- Model DI-RF7 - 6-1/4" by 6-1/4"
- Model DI-RF12 - 6-1/4" by 11-1/4"
- Model DI-RF18 - 6-1/4" by 17-1/4"
- Model DI-RF24 - 6-1/4" by 23-1/4"

Materials

- All stainless steel

Faucet

- Accepts 3/8" cold water lead
- 30 psi water pressure regulator included

03012383 Rinsers Faucet Assembly	 Intertek 4004503 Conforms to NSF/ANSI STD 372
--	---

To view cleaning and care instructions, please visit:
http://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com	Approval/Notes:
--	-----------------

Specifications subject to change without notice. For current specifications please visit our website.

Glastender®

A family company manufacturing in the USA

www.glastender.com

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Mixology Units



MRS-12, MTS-14, MFT-8, MFS-12, MFT-20

MFS-12



Intertek

4004503
Conforms to ANSI/NSF STD 2
Certified to CSA/CAN STD B45.4

MFT-20

MFT-8

★ Backsplash faucets are NSF/ANSI 61, Annex G low lead compliant

Standard Features

- Manufactured with total welded construction to meet NSF® standards.
- All stainless steel construction.
- One-piece seamless top and backsplash featuring 1/4" radius corners for easy cleaning.
- Adjustable stainless steel bullet feet (does not include MFT-8).
- MRS-12 model - faucet is standard and ships mounted. Includes push-down rinser faucet to rinse shaker cans and a lift-out perforated plastic sink strainer.
- MTS-14 model - faucet is standard and ships mounted. Includes push-down rinser faucet to rinse shaker cans, a lift-out perforated plastic sink strainer, and a 6" diameter seamless welded draining dipper well and faucet for mixology tools.
- MFT-8 model - includes push-down rinser faucet to rinse shaker cans, a 6" diameter seamless welded draining dipper well and faucet for mixology tools, and a 7-1/2" x 7-1/2" cutting board that is securely mounted but easily removable for cleaning. NOTE: No legs. Must mount to adjacent underbar.
- MFS-12 model - faucet is standard and ships mounted. Includes a lift-out perforated plastic sink strainer, and an 8" x 11" cutting board that is securely mounted but easily removable for cleaning.
- MFT-20 model - faucet is standard and ships mounted. Includes push-down rinser faucet to rinse shaker cans, a lift-out perforated plastic sink strainer, a 6" diameter seamless welded draining dipper well and faucet for mixology tools, an 8" x 11" cutting board that is securely mounted but easily removable for cleaning, and an ice scoop well.

NOTE: MFT-8 model has no accommodation for legs and must be mounted to at least one adjacent piece of underbar.

Specifications

Drain for sinks and dipper wells

- 1-1/2" I.P.S. Threaded drain will fit Dearborn part #8033 slipnut and part #W-573P washer.

Backsplash Faucet

- Backsplash mounted on 4" centers, accepts 3/8" sink leads, hot and cold water connections required

Dipper Well Faucet (on MFT-8, MTS-14, & MFT-20 models)

- Accepts 3/8" cold water lead

Rinser Faucet (on MRS-12, MTS-14, MFT-8, & MFT-20 models)

- Accepts 3/8" cold water lead
- 30 psi water pressure regulator included

Sink Bowl Dimensions (MFT-8 does not include a sink)

- 9-1/4" by 11-1/2" by 6" deep

Legs (MFT-8 has no legs, must mount to adjacent underbar)

- 1-5/8" diameter, 16 gauge stainless steel
- Stainless steel bullet feet

Materials

- 20 gauge stainless steel parts include: all components unless otherwise noted

⚠ WARNING: The plastic wet waste strainer included with this product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.
Warning applies to State of California only. Part #03000483

To view underbar installation instructions, please visit: https://www.glastender.com/PDF/F-750-165_Underbar_Installation_Instructions.pdf
To view cleaning and care instructions, please visit: https://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf


Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Approval/Notes:





Specifications subject to change without notice. For current specifications please visit our website.

Mixology Units

Dimensional Information

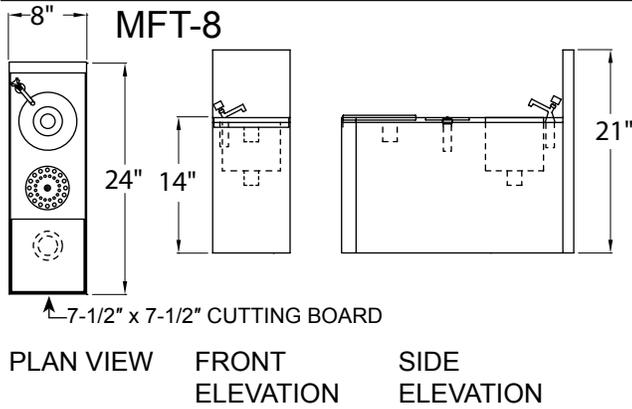

NOTE: MFT-8 model has no accommodation for legs and must be mounted to at least one adjacent piece of underbar.

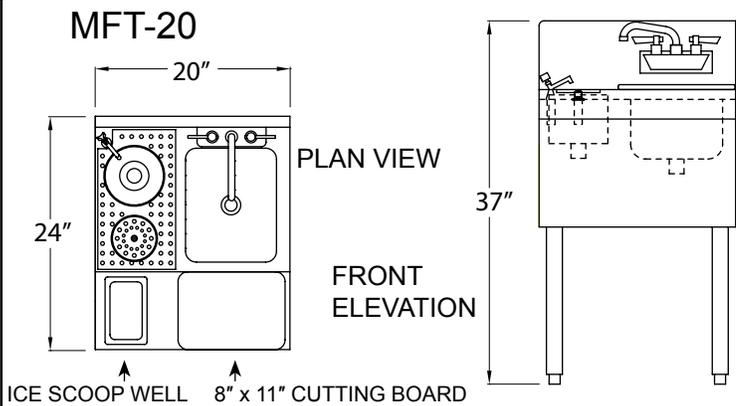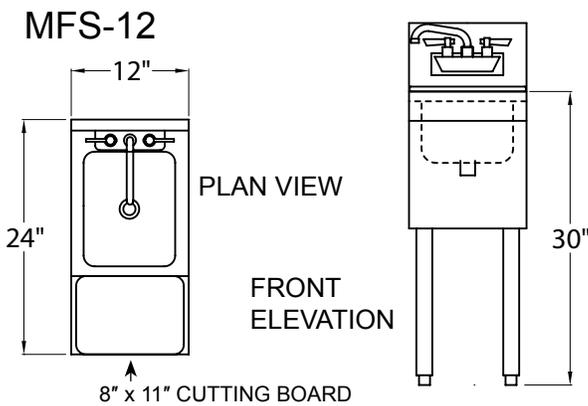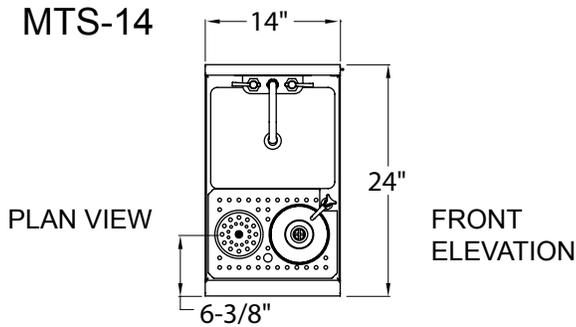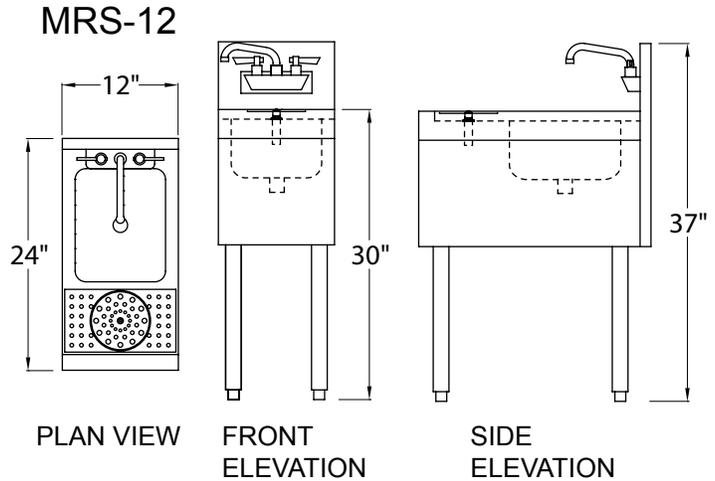


Rinser Faucet Installation Notes

- Important: Unit must be installed in conformance with applicable federal, state, and local plumbing codes, including adequate backflow when required.
- Must install backflow prevention device conforming to ANSI/ASSE 1022 or ANSI/ASSE 1024 to meet plumbing code (not included).
- Install in-line water regulator (included).
- A separate shut-off valve is recommended (not included).

03012383
Rinser Faucet
Assembly



Intertek
4004503
Conforms to NSF/ANSI STD 372

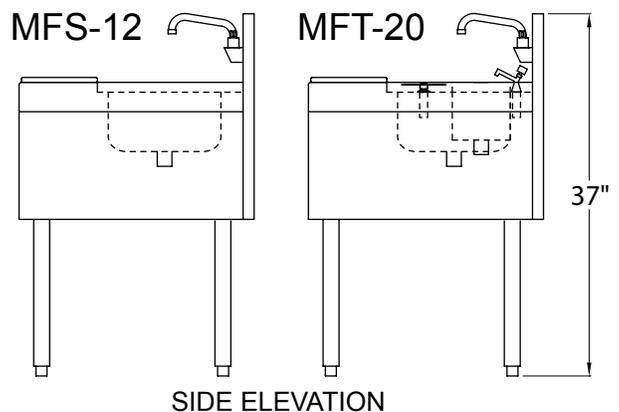

**Glas
tender**

5400 N Michigan Rd • Saginaw, MI • 48604-9780
989.752.4275 • 800.748.0423 • Fax 989.752.4444
www.glastender.com

Printed in USA

Project: _____	AIA# _____
Item #: _____ Qty: _____	SIS# _____
Model #: _____	

Liquor Steps

See reverse side for model number key



LDA-24



Intertek

4004503
 Conforms to ANSI/NSF STD 2

Standard Features

- Easily usable height for storage
- All stainless steel construction and stainless steel bullet feet
- Includes radius interior corners for easy cleaning
- Four (4) levels of liquor bottle storage for 24" deep models and five (5) levels for 29" deep models
- Bottle retaining rails with clear lift-off liquor identification cover
- Open step-and-rail design for easy cleaning and better view of bottles
- Locking covers are available for each individual row, see Locking Speed Rail Covers on page 3.32
- Matches speed rail design for continuity
- Specially designed side profiles to align with four different equipment mounting situations
- Standard models available in 6" incremental lengths from 12" to 42" (Custom sizes also available)
- Rear step on each model is extra wide for specialty liquor bottles

To view underbar installation instructions, please visit: https://www.glastender.com/PDF/F-750-165_Underbar_Installation_Instructions.pdf
 To view cleaning and care instructions, please visit: https://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf

Specifications	Product Information
-----------------------	----------------------------

Legs

- 1-5/8" diameter, 16 gauge stainless steel
- Stainless steel bullet feet

Materials

- 20 gauge stainless steel parts include: all components unless otherwise noted
- 18 gauge stainless steel parts include: leg pads
- 14 gauge stainless steel parts include: sides
- PVC plastic step and rail covers


Liquor Steps provide tiered liquor bottle storage at a height convenient for bartender use. They maintain the same easy to clean, open step and rail design as a speed rail. Each step and rail has PVC sound deadening covers and each rail includes a clear lift-off liquor identification cover. The 24" deep models provide four levels of storage front to back and the 29" deep models provide five.

Liquor steps cannot have a speed rail mounted to them. Since speed rails are so common on underbar, liquor steps have been designed to align with underbar that has a speed rail. The four different liquor steps styles are based on the four different equipment mounting situations.

Glastender, Inc. • 5400 N Michigan Rd • Saginaw, MI • 48604-9780 989.752.4275 • 800.748.0423 • Fax 989.752.4444 www.glastender.com	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.	

Liquor Steps


Dimensional Information




PLAN VIEW
(both models)

24" Deep Models


Model Number	Model Number	X
LDA-12S	LDB-12	12"
LDA-18S	LDB-18	18"
LDA-24S	LDB-24	24"
LDA-30S	LDB-30	30"
LDA-36S	LDB-36	36"
LDA-42S	LDB-42	42"

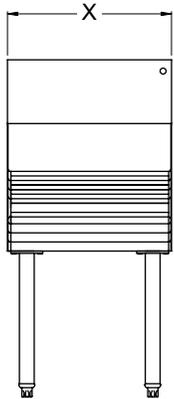

FRONT
ELEVATION

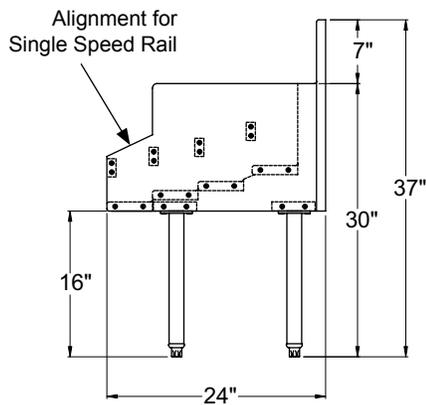

LDA-__S

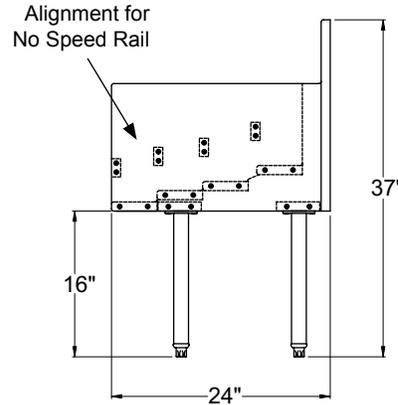


LDB-__

SIDE ELEVATIONS


* Denotes length in inches

29" Deep Models


Model Number	Model Number	X
LDA-12D	LDB-12S	12"
LDA-18D	LDB-18S	18"
LDA-24D	LDB-24S	24"
LDA-30D	LDB-30S	30"
LDA-36D	LDB-36S	36"
LDA-42D	LDB-42S	42"

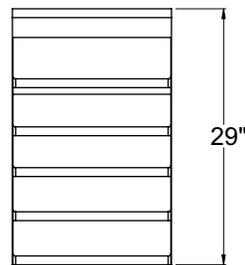


PLAN VIEW
(both models)

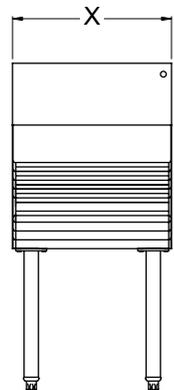

FRONT
ELEVATION

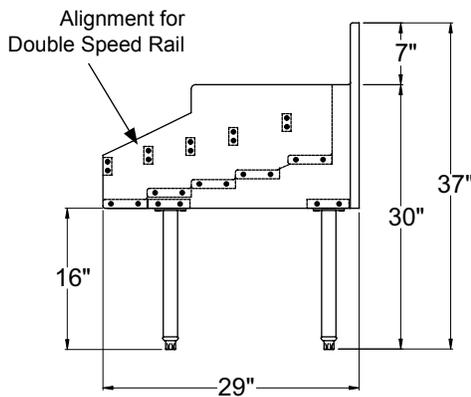

LDA-__D

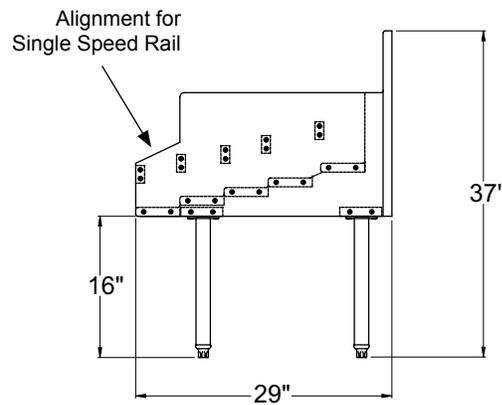

LDB-__S

SIDE ELEVATIONS

* Denotes length in inches

Glastender undercounter built in refrigerators comes in four temperatures of 1 to 4°, 6 to 10°, 12 to 18°, and 0 to -10° Celsius.

- For chilled beers, champagnes, and colas
- White and Still Wines
- Red and Rose Wines
- Glass Frosting, Ice Mold, and Chilled Liquors

Each refrigerator is freshly built to order using new sheets of fresh stainless. None of the products are sitting on a shelf aging for months or affected by the environment before they are shipped.

The customer therefore gets the chance to select diverse options in design to meet their décor needs for the interior space.



ADVANCED CONFIGURATIONS & CUSTOMIZATION



Each refrigerator can be configured from ground up to meet a wide option of variation, such as,

- From one to four doors
- Sizes as 24, 28, 36, 44, 52, 60, 72, 84, 92 and 108" wide, and a base height of 29 and 35 inches. Add casters or leg set to raise from floor level.
- Select styles of handles from signature, pull tab, and tube (shown).
- Select door or drawer per section.
- Choose door or drawer finish from brushed or jewelled stainless, or a wide variety of laminates to meet interior design.
- Choose solid or glass doors. Drawers are solid.
- Select the type of lighting as warm, bright, blue, or red.
- Select cabinet temperature. One fridge can have two zones only when more than a door. Single door unit has one temperature.

INSTALLATION EXAMPLES



Model C2SB44 Two Zone Cooler.

Selected as built in undercounter cooler to store beverages at 1 to 4°, 6 to 10° Celsius for beers, white and red wines.

The wine doors top section is to allow open standing and lower horizontal bottles. Matt black laminate finish selected by customer.



Model C2FB72 Two Zone Cooler.

Selected as built in undercounter cooler. The cabinet is built with three sections, 1st wine door (6 to 12°), 2nd drawers and 3rd chilled door (1 to 4°). Custom laminate selected from Wilsonart USA; factory finished for the owner.


Laminate - Black Alicante -
4926 (wilsonart.com)

SET UP A DRAFT BEER SYSTEM

Cobra 1-Faucet Beer Tower

Glastender bar refrigerators are draft beer configurable by adding beer tower, and CO2 regulator system, converting it to a Kegerator. Enjoy one to three different beers from one cooler.

User beer system brochure.

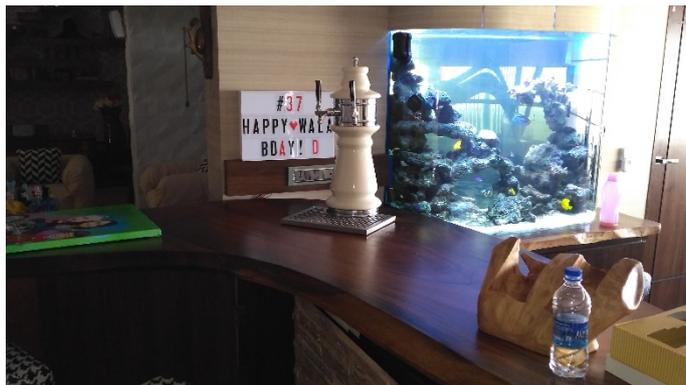

EXTERIOR FINISHES



Brushed Stainless

Black Vinyl

Custom Laminates

Raised Panel Wooden

Select laminate finishes at <https://www.wilsonart.com/laminate-surfaces>

COMPLIMENT WITH DRINK PREP STATIONS



Built in Drink Prep Units

Many options for in-counter drink stations that fit into the counter through a cut out, that turn a furniture to a functional bar such as an insulated ice bin, garnish dispenser, bottles well, sink, faucets, drainpan to keep glasses, and rinsers.

Below the counter advised are:

- Ice Machine
- Glass Froster
- Wine Cooler
- Glass Washer
- Low profile bar chiller with drawers or doors
- Storage for filters or chillers

MODULAR BAR PREP STATIONS



Modular Free Standing Prep Stations

The free-standing stations allow more professional features in all sizes to fit a bar of just six feet long to ten or twenty and above. There's no need to build a readymade top. Work tops to storage and refrigeration are all available at the modular bar.

DOWNLOAD SPECIFICATIONS

Bar Refrigeration

- [All Glastender Reach-in Refrigeration](#)
- [All Glastender Reach-in Frosters](#)

Built in Prep Units

- [Drop-in icebins](#) (12,18,24")
- [Drop-in sinks](#) (12,14")
- [Drop-in ice & sink combo units](#) (24")
- [Drop-in drain pans](#) (glass storage)


Custom Modular Bar System

Custom bars are built by design as a project. Forward your CAD plan and order your bar design.



DW180 OCX2


DW180 OCX2	Power supply and nominal consumption Alimentazione e consumo nominale			Net weight Peso netto
	12/24 Vdc	115 Vac	230 Vac	
RFX	45W	-	-	56 kg.
BTX	61W	-	-	56 kg.
DTX	61W	-	-	56 kg.
BTX IM	-	168W	140W	61 kg.
DTX IM	-	168W	140W	61 kg.

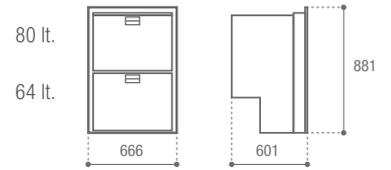

- 1 Fridge / Frigorifero
- 2 Freezer / Congelatore
- 3 Freezer+Icemaker / Congelatore + Icemaker

DW100 OCX2

DW100 OCX2	Power supply and nominal consumption Alimentazione e consumo nominale		Net weight Peso netto
	12/24 Vdc	115 Vac	
RFX	40W	-	32 kg.
BTX	52W	-	32 kg.

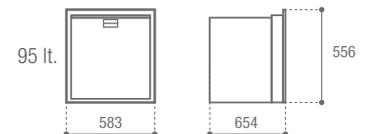

- 1 Fridge / Frigorifero
- 2 Freezer / Congelatore

DW DRINKS SERIES

CHEERS!

ALLA VOSTRA SALUTE!

Designed to offer even greater comfort onboard, the "Drinks Series" is mainly dedicated to drinks and beverages storage.

The drinks placement is made easy thanks to a sliding basket on the upper part of the drawer, equipped with a drawer separator for three 2 litres bottles.

Pensata per offrire un sempre maggior comfort a bordo, la serie dei frigoriferi a cassetto in versione "Drinks" è dedicata prevalentemente allo storage di bibite e bevande.

Il posizionamento delle bevande è facilitato dalla presenza di un cestello scorrevole sulla parte superiore del cassetto dotato di un separatore con lo spazio utile per 3 bottiglie da 2 litri.




Precise temperature control

CONTROLLO PRECISO DELLA TEMPERATURA

The new digital thermostat has 5 default settings to guarantee maximum functionality, relevant to the desired temperature, allowing to get a constant cycle even at 43°!

Il nuovo termostato digitale ha 5 impostazioni predefinite per garantire massima funzionalità in relazione alla temperatura desiderata, consentendo di avere un ciclo costante anche con 43°C!

DW62 OCX2 DRINKS



DW90 OCX2 DRINKS



Internal LED light system

SISTEMA DI ILLUMINAZIONE A LED INTERNO

All models are equipped with an internal LED light system offering high brightness with minimum consumption.

Tutti i modelli sono dotati di un sistema di luce interna a LED che offre un'elevata luminosità a fronte di consumi minimi.



Door Inside / Door Outside

PORTA A FILO INTERNO / ESTERNO

The position of the door (flush or external) is achieved by simply moving the special single stainless steel fixing profile (supplied standard) with slotting for improved air circulation and cooling efficiency, supplied standard. In addition, the refrigerator can be attached to the recessed compartment from the inside.

La posizione dell'anta (a filo o esterna) si realizza tramite la semplice scorrimento dello speciale (fornito di serie) profilo unico di fissaggio in acciaio inox dotato di asolatura per una migliore circolazione d'aria ed efficienza refrigerante, fornito di serie. Inoltre, è possibile fissare il frigorifero al vano d'incasso dall'interno.



Integrated Vent Position

SISTEMA DI VENTILAZIONE INTEGRATO

The device integrated in the Steelock handle achieves the "vent position" function, allowing the door to be held ajar, thus avoiding the formation of mould and odours during periods of non-use.

Il dispositivo integrato nella maniglia Steelock realizza la funzione di "vent position", consentendo di tenere la porta socchiusa, evitando la formazione di muffe e odori nei periodi di non utilizzo.



Ventilated Evaporator

EVAPORATORE VENTILATO

The "Drinks Series" is equipped with a ventilated evaporator allowing constant air recirculation and achieving temperature uniformity inside your refrigerator.

La "Serie Drinks" è equipaggiata con un evaporatore ventilato che consente un costante ricircolo dell'aria e il raggiungimento dell'uniformità della temperatura all'interno del frigo.



REFUEL AND GO!

FATE IL PIENO E PARTITE!

The Drinks series allows you to fill up on the drinks that best suit your habits.

The interior has been designed to manage differently the space of the drawer and the removable upper basket. This one, if necessary, is completely and easily removable.

La serie Drinks vi permette di fare il pieno delle bevande che meglio si adattano alle vostre abitudini.

L'interno è stato progettato per gestire in maniera differenziata lo spazio del cassetto e del cestello superiore estraibile e, all'occorrenza, completamente e facilmente amovibile.



Configuration with upper inserted basket

Configurazione con cestello superiore inserito

Drawer front

Parte anteriore del cassetto

- DW62: 3 bottles H max 310mm.
- DW 90: 3 bottles H max 340mm.

Drawer back

Parte posteriore del cassetto

- DW62: bottles and cans H max 250mm.
- DW 90: bottles and cans H max 280mm.


Upper basket

Cestello superiore

- DW62: bottles and cans H max 150mm.
- DW 90: bottiglie e lattine H max 160mm.

By removing the upper basket, the entire capacity of the refrigerator is available, so that you can freely storage any type of bottle or container you want.

Estraendo il cestello superiore, si ha a disposizione l'intera capacità del frigorifero, in modo da poter alloggiare liberamente qualsiasi tipologia di bottiglia o contenitore che si desidera.

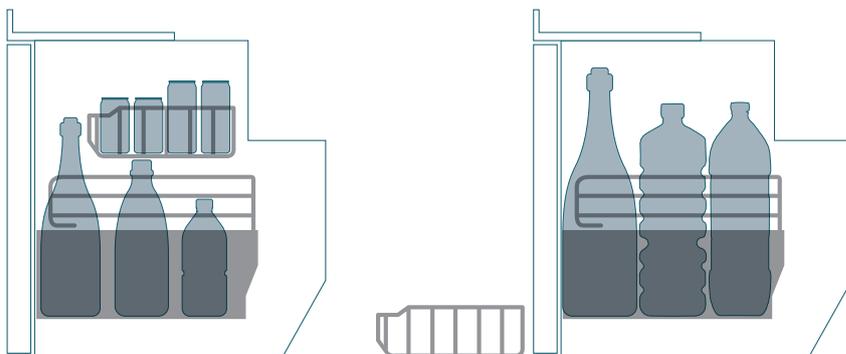

COMING
SOON


DW51 OCX2 DRINKS



LED

FRIDGE ONLY
SOLO FRIGO

Total volume Capacità totale	51 lt.
Net weight Peso netto	23 kg.
Power supply and nominal consumption Alimentazione e consumo nominale	12/24 Vdc 50 W

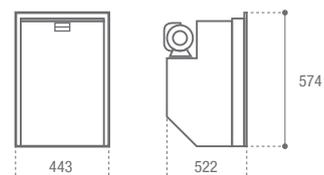

NEW


DW62 OCX2 DRINKS



LED

FRIDGE ONLY
SOLO FRIGO

Total volume Capacità totale	62 lt.
Net weight Peso netto	27 kg.
Power supply and nominal consumption Alimentazione e consumo nominale	12/24 Vdc 50 W

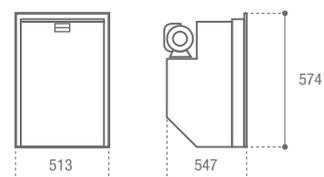

NEW


DW90 OCX2 DRINKS



LED

FRIDGE ONLY
SOLO FRIGO

Total volume Capacità totale	90 lt.
Net weight Peso netto	30 kg.
Power supply and nominal consumption Alimentazione e consumo nominale	12/24 Vdc 50 W

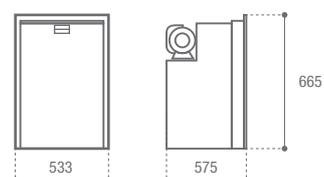

OFFICE Series

SERIE OFFICE

SUITABLE FOR STORAGE OF
IDONEI ALLA CONSERVAZIONE DI



GLASS DOOR / ANTA IN VETRO



R600a
NATURAL GAS




VITRIFRIGO

COOL AND BEYOND

C115PV

Total volume	lt.	115
Capacità totale		
Net weight	kg.	34
Peso netto		
Power supply	230Vac 50/60Hz	
Alimentazione		
Consumption	kW/24h	0,375
Consumo		



115V

OPTIONAL



OFFICE Series

SERIE OFFICE

SUITABLE FOR STORAGE OF
IDONEI ALLA CONSERVAZIONE DI



CUSTOMIZABLE DOOR PANEL / ANTA A PANNELLO PERSONALIZZABILE




R600a

NATURAL GAS



C115i

Total volume Capacità totale	lt.	115
Freezer compartment Vano freezer	lt.	17,1
Net weight Peso netto	kg.	28
Power supply Alimentazione	230Vac 50/60Hz	
Consumption Consumo	kW/24h	0,321

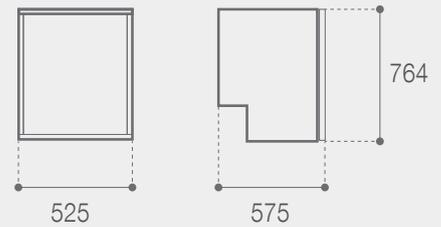

Fridge
Freezer



Optional

OPTIONAL
Fridge



OPTIONAL
115V

Available colour - Colore disponibile

STANDARD



black
nero

OPTIONAL



white
bianco

STANDARD



LED

High brightness internal LED
light system
Plafoniera LED ad alta
luminosità



Drinks shelf suitable
for 1,5-litres bottles
Balconcino adatto a
bottiglie da 1,5 litri



Replaceable finishing panel
Pannello di finitura sostituibile

Finishing panels from 0.8 mm to 3.0 mm thick. Replace the panel quickly and easily using (1) interlocking lange, without the use of tools and screws.

Pannelli di finitura con spessori da 0,8 mm. a 3,0 mm. Sostituzione del pannello facile e veloce tramite (1) pro ilo ad incastro, senza l'uso di utensili e viti.

OPTIONAL



Sliding hinge for simultaneous opening
of cabinet and minibar door
Cerniera traino per l'apertura simultanea
della porta del mobile con quella del minibar



OFFICE Series

SERIE OFFICE

SUITABLE FOR STORAGE OF
IDONEI ALLA CONSERVAZIONE DI



GLASS DOOR / ANTA IN VETRO



R600a
NATURAL GAS




OPTIONAL

VITRIFRIGO

COOL AND BEYOND

LT75 PV

Total volume	lt.	75
Capacità totale		
Net weight	kg.	24
Peso netto		
Power supply	230Vac 50/60Hz	
Alimentazione		
Consumption	kW/24h	0,384
Consumo		

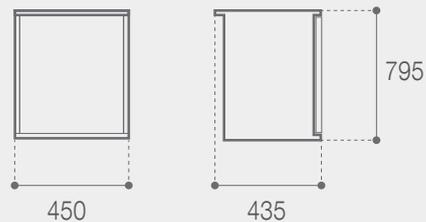

Available colour - Colore disponibile

STANDARD



black
nero

OPTIONAL



white
bianco



OFFICE Series

SERIE OFFICE

SUITABLE FOR STORAGE OF
IDONEI ALLA CONSERVAZIONE DI



BAR VERSION CUSTOMIZABLE DOOR / ANTA PERSONALIZZABILE VERSIONE BAR



R600a

NATURAL GAS



Fridge
Freezer



OPTIONAL
Fridge
Optional



115V
OPTIONAL

VITRIFRIGO


COOL AND BEYOND

LT75 BAR

Total volume Capacità totale	lt.	75
Freezer compartment Vano freezer	lt.	10,2
Net weight Peso netto	kg.	24
Power supply Alimentazione	230Vac 50/60Hz	
Consumption Consumo	kW/24h	0,310



450



795

435

Available colour - Colore disponibile

STANDARD



black
nero

OPTIONAL



white
bianco

STANDARD



High brightness internal LED
light system
Plafoniera LED ad alta
luminosità



Drinks shelf suitable
for 1,5-litres bottles
Balconcino adatto a
bottiglie da 1,5 litri



Replaceable finishing panel
Pannello di finitura sostituibile

Finishing panels from 0.8 mm to 3.0 mm thick. Replace the panel quickly and easily using (1) interlocking lange, without the use of tools and screws.

Pannelli di finitura con spessori da 0,8 mm. a 3,0 mm. Sostituzione del pannello facile e veloce tramite (1) pro ilo ad incastro, senza l'uso di utensili e viti.

OPTIONAL



Sliding hinge for simultaneous opening
of cabinet and minibar door
Cerniera traino per l'apertura simultanea
della porta del mobile con quella del minibar



OFFICE Series

SERIE OFFICE

SUITABLE FOR STORAGE OF
IDONEI ALLA CONSERVAZIONE DI



GLASS DOOR / ANTA IN VETRO



R600a
NATURAL GAS




OPTIONAL

VITRIFRIGO

COOL AND BEYOND

LT45 PV

Total volume	lt.	45
Capacità totale		
Net weight	kg.	20
Peso netto		
Power supply	230Vac 50/60Hz	
Alimentazione		
Consumption	kW/24h	0,230
Consumo		

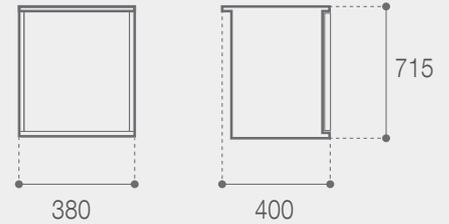

OFFICE Series

SERIE OFFICE

SUITABLE FOR STORAGE OF
IDONEI ALLA CONSERVAZIONE DI



BAR VERSION CUSTOMIZABLE DOOR / ANTA PERSONALIZZABILE VERSIONE BAR



R600a

NATURAL GAS




VITRIFRIGO

COOL AND BEYOND

LT45 BAR

Total volume	lt.	45
Capacità totale		
Freezer compartment	lt.	3,6
Vano freezer		
Net weight	kg.	20
Peso netto		
Power supply	230Vac 50/60Hz	
Alimentazione		
Consumption	kW/24h	0,151
Consumo		

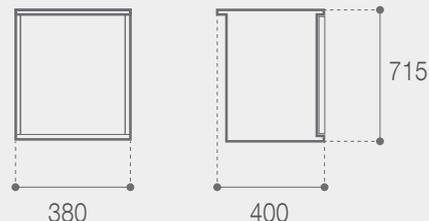

Fridge
Freezer



OPTIONAL
Fridge
Optional



OPTIONAL
115V

STANDARD



High brightness internal LED light system
Plafoniera LED ad alta luminosità



Drinks shelf suitable for 1,5-litres bottles
Balconcino adatto a bottiglie da 1,5 litri



Replaceable finishing panel
Pannello di finitura sostituibile

Finishing panels from 0.8 mm to 3.0 mm thick. Replace the panel quickly and easily using (1) interlocking lange, without the use of tools and screws.

Pannelli di finitura con spessori da 0,8 mm. a 3,0 mm. Sostituzione del pannello facile e veloce tramite (1) pro ilo ad incastro, senza l'uso di utensili e viti.

OPTIONAL



Sliding hinge for simultaneous opening of cabinet and minibar door
Cerniera traino per l'apertura simultanea della porta del mobile con quella del minibar



LIGHT D: minibar termoelettrici a cassetto



LIGHT D: minibar termoelettrici a cassetto

Il minibar a cassetto termoelettrico TD45 offre un elevato grado di comfort e di funzionalità.

La tecnologia a celle di Peltier ha raggiunto oggi un elevato livello di affidabilità ed economicità. Inoltre, tale tecnologia garantisce una notevole silenziosità e bassi consumi (classe A).

Il modello TD45 offre il massimo utilizzo dello spazio disponibile, grazie ad un cassetto capiente, dotato di alloggiamento per bottiglie e lattine. Il minibar è completo di illuminazione interna a LED e di pannello porta nero specchiato che si inserisce elegantemente in qualsiasi tipologia di arredo.

LIGHT D: drawer thermoelectric minibars


The stylish TD45 drawer minibar gives your guests easy access to perfectly chilled drinks.

Class A energy rated, the new Peltier cell technology delivers excellent reliability and power economy and is silent in operation. The TD45 has excellent storage within the drawer able to store both bottles and cans.

There is an internal LED light to display the products and the elegant mirrored black panel door fits beautifully into any type of furniture.

TD45

Capacità totale - Total volume	40 lt.
Peso netto - Net weight	15 kg.
Alimentazione - Power supply	230 Vac 50/60 Hz

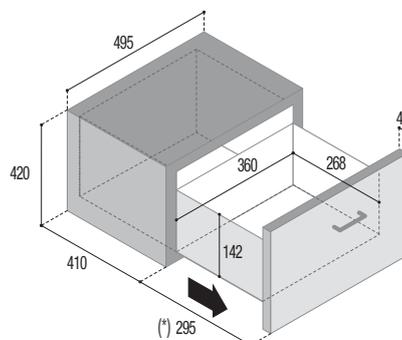

(*) Estensione massima del cassetto - Max drawer extension



OFFICE Series

SERIE OFFICE

SUITABLE FOR STORAGE OF
IDONEI ALLA CONSERVAZIONE DI



CUSTOMIZABLE DOOR PANEL / ANTA A PANNELLO PERSONALIZZABILE




R600a
NATURAL GAS



C85i



Total volume	lt.	85
Capacità totale		
Freezer compartment	lt.	12
Vano freezer		
Net weight	kg.	26
Peso netto		
Power supply	230Vac 50/60Hz	
Alimentazione		
Consumption	kW/24h	0,323
Consumo		

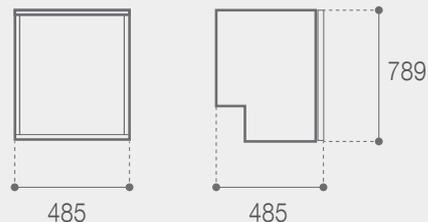

Fridge
Freezer



OPTIONAL
Fridge
Optional



115V
OPTIONAL

STANDARD



High brightness internal LED
light system
Plafoniera LED ad alta
luminosità



Drinks shelf suitable
for 1,5-litres bottles
Balconcino adatto a
bottiglie da 1,5 litri



Replaceable finishing panel
Pannello di finitura sostituibile

Finishing panels from 0.8 mm to 3.0 mm thick. Replace the panel quickly and easily using (1) interlocking lange, without the use of tools and screws.

Pannelli di finitura con spessori da 0,8 mm. a 3,0 mm. Sostituzione del pannello facile e veloce tramite (1) pro ilo ad incastro, senza l'uso di utensili e viti.

OPTIONAL



Sliding hinge for simultaneous opening
of cabinet and minibar door
Cerniera traino per l'apertura simultanea
della porta del mobile con quella del minibar





BA6H

Backbar Cooler

Product Features

- EU Energy Class A
- Approx. 59% more energy efficient than previous BA-range
- Double glazed tempered glass
- Reversible glass door
- Ventilated cooling for fast pull-down and even temperature
- Easy access electronic thermostat
- Adjustable shelves
- LED interior light
- Lock

High-quality backbar with low energy consumption

The BA is our range of high-quality backbars. It has been updated and now uses in average 59% less energy compared to the previous models from the same range. This backbar has ventilated cooling for a short pull-down time to ensure that you can keep up with customer demand for cold beverages. If you need to adjust the temperature this is easily done on the electronic thermostat. The backbar cooler is made of solid materials and has adjustable chrome shelves with closely-spaced wires, which gives you a high capacity and stability. Furthermore, it has a reversible aluminium door with double glazed tempered glass. This helps save energy, but it also means a great product visibility.

Measures and Content

Total Display Area	m ²	0.29
Temperature Range	°C	+2 to +10
Climate Class		4
Gross / Net Weight	kg	45 / 40
Gross / Net Volume	l	105 / 92

Design and Material

Door No & Type		1 hinged glass door
Door Reversible		Yes
Tempered glass		Yes
Shelves No & Type		2 wire shelves chrome
Shelf Color		Chrome
Shelf Dimensions		395x350 mm
Feet / Legs		4 adjustable feet
Exterior Finish		Black
Interior Finish		Stucco aluminium
Interior Light		LED
Lock		Yes

Cooling and Functions


Type of Controller		Electronic
Type of Cooling		Ventilated
Type of Defrost		Automatic
Refrigerant		R600a
Refrigerant Charge	g	45
Thermometer		Yes

Power and Consumption

Energy Class		A
Energy Consumption	kWh/24h	0.85
Annual Energy Cons.	kWh/year	310
Power		1
Max Ambient		30°C at 55% RH
Input Power	W	95
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	44

Dimensions


Internal Dimension (WxDxH)	mm	410 x 418 x 720
External Dimension (WxDxH)	mm	500 x 520 x 870
Packed Dimension (WxDxH)	mm	585 x 575 x 940
40ft Container Load	pcs	160

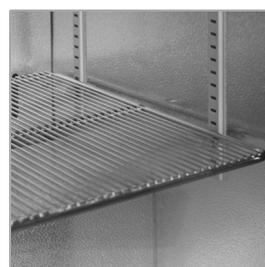

Adjustable wire shelves



Electronic thermostat



BA11H

Backbar Cooler

Product Features

- EU Energy Class A
- Approx. 59% more energy efficient than previous BA-range
- Double glazed tempered glass
- Reversible glass door
- Ventilated cooling for fast pull-down and even temperature
- Easy access electronic thermostat
- Adjustable shelves
- LED interior light
- Lock

High-quality backbar with low energy consumption

The BA is our range of high-quality backbars. It has been updated and now uses in average 59% less energy compared to the previous models from the same range. This backbar has ventilated cooling for a short pull-down time to ensure that you can keep up with customer demand for cold beverages. If you need to adjust the temperature this is easily done on the electronic thermostat. The backbar cooler is made of solid materials and has adjustable chrome shelves with closely-spaced wires, which gives you a high capacity and stability. Furthermore, it has a reversible aluminium door with double glazed tempered glass. This helps save energy, but it also means a great product visibility.

Measures and Content

Total Display Area	m ²	0.37
Temperature Range	°C	+2 to +10
Climate Class		4
Gross / Net Weight	kg	53 / 47
Gross / Net Volume	l	128 / 118

Design and Material

Door No & Type		1 hinged glass door
Door Reversible		Yes
Tempered glass		Yes
Shelves No & Type		2 wire shelves chrome
Shelf Color		Chrome
Shelf Dimensions		495x350 mm
Feet / Legs		4 adjustable feet
Exterior Finish		Black
Interior Finish		Stucco aluminium
Interior Light		LED
Lock		Yes

Cooling and Functions


Type of Controller		Electronic
Type of Cooling		Ventilated
Type of Defrost		Automatic
Refrigerant		R600a
Refrigerant Charge	g	55
Thermometer		Yes

Power and Consumption

Energy Class		A
Energy Consumption	kWh/24h	0.96
Annual Energy Cons.	kWh/year	350
Max Ambient		30°C at 55% RH
Input Power	W	95
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	44

Dimensions

Internal Dimension (WxDxH)	mm	510 x 418 x 734
External Dimension (WxDxH)	mm	600 x 520 x 900
Packed Dimension (WxDxH)	mm	685 x 575 x 970
40ft Container Load	pcs	136

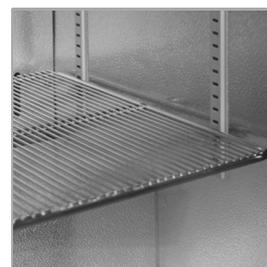

Adjustable wire shelves



Electronic thermostat



BA16H

Backbar Cooler

Product Features

- EU Energy Class A
- Approx. 59% more energy efficient than previous BA-range
- Double glazed tempered glass
- Reversible glass door
- Ventilated cooling for fast pull-down and even temperature
- Easy access electronic thermostat
- Adjustable shelves
- LED interior light
- Lock

High-quality backbar with low energy consumption

The BA is our range of high-quality backbars. It has been updated and now uses in average 59% less energy compared to the previous models from the same range. This backbar has ventilated cooling for a short pull-down time to ensure that you can keep up with customer demand for cold beverages. If you need to adjust the temperature this is easily done on the electronic thermostat. The backbar cooler is made of solid materials and has adjustable chrome shelves with closely-spaced wires, which gives you a high capacity and stability. Furthermore, it has a reversible aluminium door with double glazed tempered glass. This helps save energy, but it also means a great product visibility.

Measures and Content

Total Display Area	m ²	0.35
Temperature Range	°C	+2 to +10
Climate Class		4
Gross / Net Weight	kg	52 / 46
Gross / Net Volume	l	125 / 115

Design and Material

Door No & Type	1 hinged glass door	
Door Reversible	Yes	
Tempered glass	Yes	
Shelves No & Type	2 wire shelves chrome	
Shelf Color	Chrome	
Shelf Dimensions	495x350 mm	
Feet / Legs	4 adjustable feet	
Exterior Finish	Black	
Interior Finish	Stucco aluminium	
Interior Light	LED	
Lock	Yes	

Cooling and Functions

Type of Controller	Electronic	
Type of Cooling	Ventilated	
Type of Defrost	Automatic	
Refrigerant	R600a	
Refrigerant Charge	g	55
Thermometer	Yes	

Power and Consumption

Energy Class	A	
Energy Consumption	kWh/24h	0.96
Annual Energy Cons.	kWh/year	350
Max Ambient	30°C at 55% RH	
Input Power	W	95
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	44

Dimensions


Internal Dimension (WxDxH)	mm	510 x 418 x 720
External Dimension (WxDxH)	mm	600 x 520 x 870
Packed Dimension (WxDxH)	mm	685 x 575 x 940
40ft Container Load	pcs	136



Adjustable wire shelves



Electronic thermostat



BA21H

Backbar Cooler

Product Features

- EU Energy Class A
- Approx. 59% more energy efficient than previous BA-range
- Ventilated cooling for fast pull-down and even temperature
- Energy saving variable speed compressor
- Double glazed tempered glass
- Hinged alu-framed glass doors
- Easy access electronic thermostat
- Adjustable shelves behind each door
- LED interior light
- Lock

High-quality backbar with low energy consumption

The BA is our range of high-quality backbars. It has been updated and now uses in average 59% less energy compared to the previous models from the same range. This backbar has ventilated cooling for a short pull-down time to ensure that you can keep up with customer demand for cold beverages. If you need to adjust the temperature this is easily done on the electronic thermostat. The backbar cooler is made of solid materials and has adjustable chrome shelves with closely-spaced wires, which gives you a high capacity and stability. Furthermore, it has hinged aluminium doors with double glazed tempered glass. This helps save energy, but it also means a great product visibility. The BA range is also available in a variant with self-closing sliding doors.

Measures and Content

Total Display Area	m ²	0.52
Temperature Range	°C	+2 to +10
Climate Class		4
Gross / Net Weight	kg	70 / 64
Gross / Net Volume	l	196 / 188

Design and Material

Door No & Type	2 hinged glass doors	
Door Reversible	No	
Tempered glass	Yes	
Shelves No & Type	4 wire shelves chrome	
Shelf Color	Chrome	
Shelf Dimensions	395x328 mm	
Feet / Legs	4 adjustable feet	
Exterior Finish	Black	
Interior Finish	Stucco aluminium	
Interior Light	LED	
Lock	Yes	

Cooling and Functions


Type of Controller	Electronic	
Type of Cooling	Ventilated	
Type of Defrost	Automatic	
Refrigerant	R600a	
Refrigerant Charge	g	70
Thermometer	Yes	

Power and Consumption

Energy Class	A	
Energy Consumption	kWh/24h	1.08
Annual Energy Cons.	kWh/year	394
Max Ambient	30°C at 55% RH	
Input Power	W	115
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	44

Dimensions

Internal Dimension (WxDxH)	mm	810 x 418 x 734
External Dimension (WxDxH)	mm	900 x 520 x 900
Packed Dimension (WxDxH)	mm	985 x 575 x 970
40ft Container Load	pcs	96

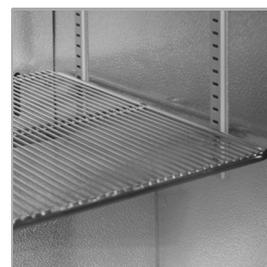

Adjustable wire shelves



Electronic thermostat



BA26H

Backbar Cooler

Product Features

- EU Energy Class A
- Approx. 59% more energy efficient than previous BA-range
- Ventilated cooling for fast pull-down and even temperature
- Energy saving variable speed compressor
- Double glazed tempered glass
- Hinged alu-framed glass doors
- Easy access electronic thermostat
- Adjustable shelves behind each door
- LED interior light
- Lock

High-quality backbar with low energy consumption

The BA is our range of high-quality backbars. It has been updated and now uses in average 59% less energy compared to the previous models from the same range. This backbar has ventilated cooling for a short pull-down time to ensure that you can keep up with customer demand for cold beverages. If you need to adjust the temperature this is easily done on the electronic thermostat. The backbar cooler is made of solid materials and has adjustable chrome shelves with closely-spaced wires, which gives you a high capacity and stability. Furthermore, it has hinged aluminium doors with double glazed tempered glass. This helps save energy, but it also means a great product visibility. The BA range is also available in a variant with self-closing sliding doors.

Measures and Content

Total Display Area	m ²	0.5
Temperature Range	°C	+2 to +10
Climate Class		4
Gross / Net Weight	kg	69 / 63
Gross / Net Volume	l	190 / 182

Design and Material

Door No & Type	2 hinged glass doors	
Door Reversible	No	
Tempered glass	Yes	
Shelves No & Type	4 wire shelves chrome	
Shelf Color	Chrome	
Shelf Dimensions	395x328 mm	
Feet / Legs	4 adjustable feet	
Exterior Finish	Black	
Interior Finish	Stucco aluminium	
Interior Light	LED	
Lock	Yes	

Cooling and Functions


Type of Controller	Electronic	
Type of Cooling	Ventilated	
Type of Defrost	Automatic	
Refrigerant	R600a	
Refrigerant Charge	g	70
Thermometer	Yes	

Power and Consumption

Energy Class	A	
Energy Consumption	kWh/24h	1.08
Annual Energy Cons.	kWh/year	394
Max Ambient	30°C at 55% RH	
Input Power	W	115
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	44

Dimensions


Internal Dimension (WxDxH)	mm	810 x 418 x 720
External Dimension (WxDxH)	mm	900 x 520 x 870
Packed Dimension (WxDxH)	mm	985 x 575 x 940
40ft Container Load	pcs	96

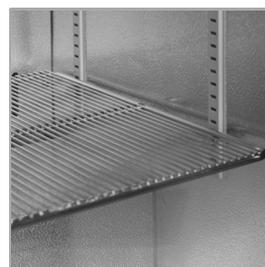

Adjustable wire shelves



Electronic thermostat

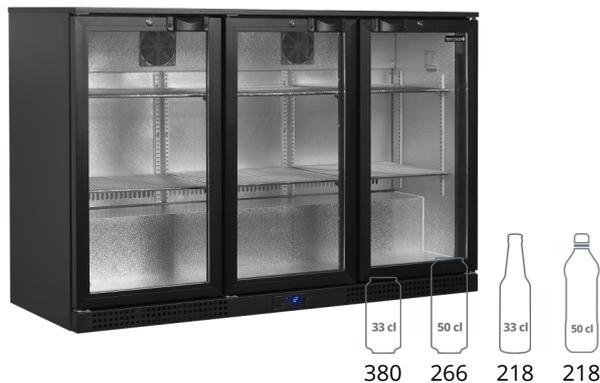

BA31H

Backbar Cooler

Product Features

- EU Energy Class B
- Approx. 59% more energy efficient than previous BA-range
- Ventilated cooling for fast pull-down and even temperature
- Energy saving variable speed compressor
- Double glazed tempered glass
- Hinged alu-framed glass doors
- Easy access electronic thermostat
- Adjustable shelves behind each door
- LED interior light
- Lock

High-quality backbar with low energy consumption

The BA is our range of high-quality backbars. It has been updated and now uses in average 59% less energy compared to the previous models from the same range. This backbar has ventilated cooling for a short pull-down time to ensure that you can keep up with customer demand for cold beverages. If you need to adjust the temperature this is easily done on the electronic thermostat. The backbar cooler is made of solid materials and has adjustable chrome shelves with closely-spaced wires, which gives you a high capacity and stability. Furthermore, it has hinged aluminium doors with double glazed tempered glass. This helps save energy, but it also means a great product visibility. The BA range is also available in a variant with self-closing sliding doors.

Measures and Content

Total Display Area	m ²	0.77
Temperature Range	°C	+2 to +10
Climate Class		4
Gross / Net Weight	kg	99 / 92
Gross / Net Volume	l	311 / 288

Design and Material

Door No & Type	3 hinged glass doors	
Door Reversible	No	
Tempered glass	Yes	
Shelves No & Type	6 wire shelves chrome	
Shelf Color	Chrome	
Shelf Dimensions	400x318 / 432x318 mm	
Feet / Legs	4 adjustable feet	
Exterior Finish	Black	
Interior Finish	Stucco aluminium	
Interior Light	LED	
Lock	Yes	

Cooling and Functions


Type of Controller	Electronic	
Type of Cooling	Ventilated	
Type of Defrost	Automatic	
Refrigerant	R290	
Refrigerant Charge	g	90
Thermometer	Yes	

Power and Consumption

Energy Class	B	
Energy Consumption	kWh/24h	1.8
Annual Energy Cons.	kWh/year	657
Power	1	
Max Ambient	30°C at 55% RH	
Input Power	W	125
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	44

Dimensions

Internal Dimension (WxDxH)	mm	1265 x 418 x 734
External Dimension (WxDxH)	mm	1350 x 520 x 900
Packed Dimension (WxDxH)	mm	1435 x 575 x 970
40ft Container Load	pcs	64

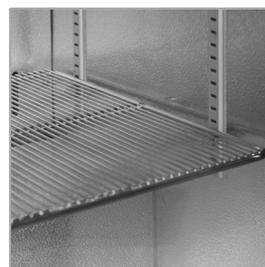

Adjustable wire shelves



Electronic thermostat



UR200G

Display Cooler

Product Features

- Hinged glass door
- Electronic thermostat
- Reversible door
- LED interior light with switch
- Adjustable shelves
- Fan assisted cooling
- Adjustable feet with rollers to rear
- Digital controller and temperature display

Measures and Content

Total Display Area	m ²	0.23
Temperature Range	°C	+2 to +10
Climate Class		4
Gross / Net Weight	kg	49 / 44
Gross / Net Volume	l	136 / 119

Design and Material

Door No & Type		1 hinged glass door
Tempered glass		Yes
Door Reversible		Yes
Shelves No & Type		3 wire shelves white
Shelf Color		White
Shelf Dimensions		505 x 415 mm
Bottom Shelf Dimensions		505 x 220
Max load on Shelves	kg/m ²	110
Feet / Legs		4 adjustable feet
Castors		2 rollers
Exterior Finish		White
Interior Finish		White ABS
Interior Light		LED
Lock		Yes

Cooling and Functions

Type of Controller		Electronic
Type of Cooling		Fan assisted
Type of Defrost		Automatic
Refrigerant		R600a
Refrigerant Charge	g	35
Thermometer		Yes

Power and Consumption

Energy Class		B
Energy Consumption	kWh/24h	1.6
Annual Energy Cons.	kWh/year	584
Power		1
Max Ambient		30°C at 55% RH
Input Power	W	105
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	40

Dimensions

Internal Dimension (WxDxH)	mm	510 x 485 x 620
External Dimension (WxDxH)	mm	600 x 585 x 855
Packed Dimension (WxDxH)	mm	690 x 650 x 910
40ft Container Load	pcs	108



Electronic thermostat



Internal fan



UR200SG

Display Cooler

Product Features

- Hinged glass door
- Electronic thermostat
- Reversible door
- Adjustable shelves
- Fan assisted cooling
- Stainless steel cabinet
- Fully automatic
- Adjustable feet with rollers to rear
- LED interior light with switch

Measures and Content

Total Display Area	m ²	0.23
Temperature Range	°C	+2 to +10
Climate Class		4
Gross / Net Weight	kg	49 / 44
Gross / Net Volume	l	136 / 119

Design and Material

Door No & Type		1 hinged glass door
Tempered glass		Yes
Door Reversible		Yes
Shelves No & Type		3 wire shelves white
Shelf Color		White
Shelf Dimensions		505 x 415 mm
Bottom Shelf Dimensions		505 x 220
Max load on Shelves	kg/m ²	110
Feet / Legs		4 adjustable feet
Castors		2 rollers
Exterior Finish		SS430
Interior Finish		White ABS
Interior Light		LED
Lock		Yes

Cooling and Functions

Type of Controller		Electronic
Type of Cooling		Fan assisted
Type of Defrost		Automatic
Refrigerant		R600a
Refrigerant Charge	g	35
Thermometer		Yes

Power and Consumption

Energy Class		B
Energy Consumption	kWh/24h	1.6
Annual Energy Cons.	kWh/year	584
Power		1
Max Ambient		30°C at 55% RH
Input Power	W	105
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	40

Dimensions

Internal Dimension (WxDxH)	mm	510 x 485 x 620
External Dimension (WxDxH)	mm	600 x 585 x 855
Packed Dimension (WxDxH)	mm	690 x 650 x 910
40ft Container Load	pcs	108



Electronic thermostat



Internal fan



UR200S

Storage Cooler

Product Features

- Stainless steel cabinet
- Integrated handle
- Reversible solid door
- Electronic thermostat
- Fan assisted cooling
- Adjustable shelves
- Lock
- Digital controller and temperature display
- Adjustable feet with rollers to rear

Measures and Content

Temperature Range	°C	+2 to +10
Climate Class		4
Gross / Net Weight	kg	49 / 44
Gross / Net Volume	l	136 / 119

Design and Material

Door No & Type		1 hinged solid door
Shelves No & Type		3 wire shelves white
Shelf Color		White
Shelf Dimensions		505 x 415 mm
Bottom Shelf Dimensions		505 x 220
Max load on Shelves	kg/m ²	110
Feet / Legs		4 adjustable feet
Castors		2 rollers
Exterior Finish		SS430
Interior Finish		White ABS
Interior Light		No
Lock		Yes

Cooling and Functions

Type of Controller		Electronic
Type of Cooling		Fan assisted
Type of Defrost		Automatic
Refrigerant		R600a
Refrigerant Charge	g	35
Thermometer		Yes

Power and Consumption

Energy Class		A
Energy Consumption	kWh/24h	1.12
Annual Energy Cons.	kWh/year	409
Power		1
Max Ambient		30°C at 55% RH
Input Power	W	105
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	40

Dimensions

Internal Dimension (WxDxH)	mm	510 x 485 x 620
External Dimension (WxDxH)	mm	600 x 585 x 855
Packed Dimension (WxDxH)	mm	690 x 650 x 910
40ft Container Load	pcs	108



Internal fan



Integrated handle



CBC210

Backbar Cooler

Product Features

- Robust heavy duty equipment
- Self-closing doors
- Stainless steel interior
- Adjustable SS304 steel shelves
- Adjustable feet
- Ventilated cooling
- Drawers as option

Heavy-duty backbar with solid doors

The CBC is our range of robust backbars, specifically designed for busy bars where enhanced cooling capacity is needed. The backbar has an efficient ventilated cooling system to guarantee a short pull-down time, so you never run low on chilled beverages for thirsty guests. The air intake and exhaust are both placed at the front, making it easy to have the backbar build into the existing interior. The CBC backbar cooler comes with self-closing doors, LED internal lighting, adjustable SS304 stainless steel shelves, and a stainless steel interior with mirror effect. It is possible to install drawers instead of doors – contact our sales staff for more information.

Measures and Content

Temperature Range	°C	+2 to +10
Climate Class		4
Gross / Net Weight	kg	123 / 118
Gross / Net Volume	l	290 / 277

Design and Material

Door No & Type		2 hinged self-closing doors
Door Reversible		No
Shelves No & Type		4 SS304 shelves
Shelf Color		SS304
Feet / Legs		6 adjustable feet
Exterior Finish		Black
Interior Finish		SS430 mirror polished
Interior Light		No
Lock		Yes

Cooling and Functions

Type of Controller		Electronic
Type of Cooling		Ventilated
Type of Defrost		Automatic
Refrigerant		R290
Refrigerant Charge	g	95
Thermometer		Yes

Power and Consumption

Energy Class		C
Energy Consumption	kWh/24h	2.35
Annual Energy Cons.	kWh/year	858
Input Power	W	250
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	42

Dimensions

Internal Dimension (WxDxH)	mm	1082 x 415 x 760
External Dimension (WxDxH)	mm	1462 x 513 x 860
Packed Dimension (WxDxH)	mm	1540 x 580 x 1050
40ft Container Load	pcs	60



Drawers as option



Adjustable shelves



CBC210G

Backbar Cooler

Product Features

- Robust heavy duty equipment
- Self-closing glass doors
- Mirror effect stainless steel interior
- Adjustable SS304 steel shelves
- Adjustable feet
- Ventilated cooling

Heavy-duty backbar with glass doors

The CBC is our range of robust backbars, specifically designed for busy bars where enhanced cooling capacity is needed. The backbar has an efficient ventilated cooling system to guarantee a short pull-down time, so you never run low on chilled beverages for thirsty guests. The air intake and exhaust are both placed at the front, making it easy to have the backbar build into the existing interior. The CBC backbar cooler offers great product presentation with self-closing glass doors, LED internal lighting, adjustable SS304 stainless steel shelves, and a stainless steel interior with mirror effect. It is possible to install drawers instead of doors – contact our sales staff for more information.

Measures and Content

Total Display Area	m ²	0.56
Temperature Range	°C	+2 to +10
Climate Class		4
Gross / Net Weight	kg	123 / 118
Gross / Net Volume	l	290 / 277

Design and Material

Door No & Type	2 hinged self-closing glass doors	
Door Reversible	No	
Tempered glass	Yes	
Shelves No & Type	4 SS304 shelves	
Shelf Color	SS304	
Feet / Legs	6 adjustable feet	
Exterior Finish	Black	
Interior Finish	SS430 mirror polished	
Interior Light	LED	
Lock	Yes	

Cooling and Functions

Type of Controller	Electronic	
Type of Cooling	Ventilated	
Type of Defrost	Automatic	
Refrigerant	R290	
Refrigerant Charge	g	95
Thermometer	Yes	

Power and Consumption

Energy Class	C	
Energy Consumption	kWh/24h	3.18
Annual Energy Cons.	kWh/year	1159
Input Power	W	250
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	42

Dimensions

Internal Dimension (WxDxH)	mm	1082 x 415 x 760
External Dimension (WxDxH)	mm	1462 x 513 x 860
Packed Dimension (WxDxH)	mm	1540 x 580 x 1050
40ft Container Load	pcs	60



Lock



Adjustable shelves



CBC310

Backbar Cooler

Product Features

- Robust heavy duty equipment
- Self-closing doors
- Stainless steel interior
- Adjustable SS304 steel shelves
- Adjustable feet
- Ventilated cooling
- Drawers as option

Heavy-duty backbar with solid doors

The CBC is our range of robust backbars, specifically designed for busy bars where enhanced cooling capacity is needed. The backbar has an efficient ventilated cooling system to guarantee a short pull-down time, so you never run low on chilled beverages for thirsty guests. The air intake and exhaust are both placed at the front, making it easy to have the backbar build into the existing interior. The CBC backbar cooler comes with self-closing doors, LED internal lighting, adjustable SS304 stainless steel shelves, and a stainless steel interior with mirror effect. It is possible to install drawers instead of doors – contact our sales staff for more information.

Measures and Content

Temperature Range	°C	+2 to +10
Climate Class		4
Gross / Net Weight	kg	143 / 138
Gross / Net Volume	l	460 / 442

Design and Material

Door No & Type		3 hinged self-closing doors
Door Reversible		No
Shelves No & Type		6 SS304 shelves
Shelf Color		SS304
Feet / Legs		8 adjustable feet
Exterior Finish		Black
Interior Finish		SS430 mirror polished
Interior Light		No
Lock		Yes

Cooling and Functions

Type of Controller		Electronic
Type of Cooling		Ventilated
Type of Defrost		Automatic
Refrigerant		R290
Refrigerant Charge	g	95
Thermometer		Yes

Power and Consumption

Energy Class		C
Energy Consumption	kWh/24h	2.85
Annual Energy Cons.	kWh/year	1040
Input Power	W	250
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	42

Dimensions

Internal Dimension (WxDxH)	mm	1622 x 415 x 760
External Dimension (WxDxH)	mm	2002 x 513 x 860
Packed Dimension (WxDxH)	mm	2060 x 580 x 1050
40ft Container Load	pcs	44



Drawers as option



Adjustable shelves



CBC310G

Backbar Cooler

Product Features

- Robust heavy duty equipment
- Self-closing glass doors
- Mirror effect stainless steel interior
- Adjustable SS304 steel shelves
- Adjustable feet
- Ventilated cooling

Heavy-duty backbar with glass doors

The CBC is our range of robust backbars, specifically designed for busy bars where enhanced cooling capacity is needed. The backbar has an efficient ventilated cooling system to guarantee a short pull-down time, so you never run low on chilled beverages for thirsty guests. The air intake and exhaust are both placed at the front, making it easy to have the backbar build into the existing interior. The CBC backbar cooler offers great product presentation with self-closing glass doors, LED internal lighting, adjustable SS304 stainless steel shelves, and a stainless steel interior with mirror effect. It is possible to install drawers instead of doors – contact our sales staff for more information.

Measures and Content

Total Display Area	m ²	0.84
Temperature Range	°C	+2 to +10
Climate Class		4
Gross / Net Weight	kg	143 / 138
Gross / Net Volume	l	460 / 442

Design and Material

Door No & Type	3 hinged self-closing glass doors	
Door Reversible	No	
Tempered glass	Yes	
Shelves No & Type	6 SS304 shelves	
Shelf Color	SS304	
Feet / Legs	8 adjustable feet	
Exterior Finish	Black	
Interior Finish	SS430 mirror polished	
Interior Light	LED	
Lock	Yes	

Cooling and Functions

Type of Controller	Electronic	
Type of Cooling	Ventilated	
Type of Defrost	Automatic	
Refrigerant	R290	
Refrigerant Charge	g	95
Thermometer	Yes	

Power and Consumption

Energy Class	C	
Energy Consumption	kWh/24h	3.8
Annual Energy Cons.	kWh/year	1386
Input Power	W	250
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	42

Dimensions

Internal Dimension (WxDxH)	mm	1622 x 415 x 760
External Dimension (WxDxH)	mm	2002 x 513 x 860
Packed Dimension (WxDxH)	mm	2060 x 580 x 1050
40ft Container Load	pcs	44



Lock



Adjustable shelves

Optimum

THE OPTIMUM 9400X EXTREME



Optimum

Key Features & Commercial Functions

CRUSHES ICE IN SECONDS

The Optimum is a powerful commercial vortex blender able to reach an incredible speed, crushing ice in a matter of seconds, producing smooth drinks with a great consistency and no chunks.

AUTOMATIC BLENDING OPTIONS

Busy juice bars and cafes can make a smoothie at a press of a button. The Optimum will operate unattended at varied speeds for a set period of time, beeping when the cycle ends.

EASY TO REPAIR AND MAINTAIN

High-end durable components manufactured by one of the world's most renowned vortex blender manufacturers allow the Optimum to withstand the heavy-duty use of your juice bar or cafe. In the unlikely event anything does go wrong, the spare parts are affordable and easy to find, and repairing the vortex blender is simple and straightforward, unlike most other competitors. Please note repair centers are available in **India** if any urgent maintenance is required.

OPTIONAL SOUND COVER

Only 60dB with a sound cover so your customers can enjoy their time in peace.



Power	Voltage	Decibels	Capacity	Dimensions
2611W (Rated Power: 2200W)	220-240V	60dB	1.8L	215x225x480mm



POWERFUL

Industrial High Speed 2611 Watts (Rated power: 2200 Watts) Motor with up to 35,000 rpm (idle)!

DIGITAL DISPLAY + CONTROLS

Easy to use digital control panel with various functions

5 CUSTOMIZABLE BLENDING PROGRAMS

Simply set the time, speed, and duration for blending and save the setting. Next time you want to prepare the same drink just drop the ingredients and push a button

PREMIUM QUALITY

Transparent, Virtually Unbreakable 1.8L polycarbonate container

GREEN ENERGY CONSUMPTION

Induction motor with induction heating uses the exact energy the machine needs



HEAT-RESISTANT

1.8L BPA FREE Eastman Tritan Copolyester Jug - Wet & Dry Applications. Approved by FDA, UL, SGS, and the European Commission for Food Safety

PRODUCT DIMENSIONS

With sound cover : 21.5*22.5*48.cm; without sound cover: 19*21*45cm

BUILT-IN SENSOR

To detect over-usage; prolonging the life of vortex blender

STAGGERING SPEED

Able to freeze ice cream and heat soups

PRECISION

High, Med, Low & Pulse Functions

PRODUCT WEIGHT

7.8 Kg

STATE OF THE ART

Two in One Stainless Steel 6-blade cutting assembly - Crushes ice, nuts, and fruits in seconds

WHAT YOU CAN DO WITH THE 9400X



Smoothies



Nut Butters,
Spreads, Dips



Bread Dough,
Cake Batter



Homemade
Flours



Ice creams



Crush Ice

Email: support@frootie.com.au
Marketing: marketing@frootie.eu
Phone: 1300 309 900
Whatsapp: +61 3 8609 2210

@Frootie



@Frootie



@Frootie



@FrootieTV



FROOTIE
A BETTER LIFE

Drink Experience

BARZZONI™
WINESPACE

www.barzzoni.com



Cocktail Bars may require a complete design solution provided by us at no additional charge. However, a budget is estimated with features, and a deposit for the setup will be required in advance.

Check for the Wine, Water and Ice solutions needed in the bar under separate catalogs.



Barzzoni Winespace ND

372-374 First Floor, MG Road
Sultanpur, New Delhi 110030
barzzoni@barzzoni.com

91 11 41550060 / 0061 (mon – sat)
91 11 9990356055 (9am to 8pm) 7 days